


TOUGHENED GLASS INSULATORS

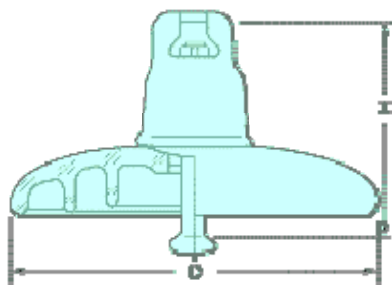

STANDARD TYPE TOUGHENED GLASS SUSPENSION INSULATORS

BALL AND SOCKET TYPE

Type	IEC Class	D mm	H mm	Creepage Distance mm	Coupling Size	Mechanical Failing Load kN	Impact Failing Load N.cm	Lightning Impulse Withstand Voltage kV	Power Frequency withstand voltage kV		Approx.Net Weight Kg
									Wet	Dry	
LXY-70	U70BS	255	127	320	16	70	565	100	40	70	4
LXY1-70	U70BL	255	146	320	16	70	565	100	40	70	4
LXY-100	U100BL	255	146	320	16	100	678	100	40	70	4.1
LXY-120	U120BL	255	146	320	16	120	678	100	40	70	4.2
LXY4-160	U160BS	280	146	400	20	160	1017	105	45	75	6.5
LXY-160	U160BL	280	170	400	20	160	1017	105	45	75	6.5
LXY3-210	U210BS	280	170	400	20	210	1017	110	45	75	6.7
LXY3-300	U300B	320	195	485	24	300	1017	130	50	85	10.7


Address: No.16-1 Jinshui Avenue, Zhengzhou, 450003 China

Tel:+86 371 65866081 65866099

Fax: +86 371 65866088

Email: libuguang@cmech-henan.com

TOUGHENED GLASS INSULATORS

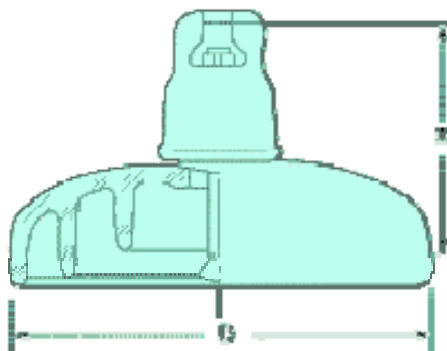

FOG TYPE TOUGHENED GLASS SUSPENSION INSULATORS

BALL AND SOCKET TYPE

Type	IEC Class	D mm	H mm	Creepage Distance mm	Coupling Size	Mechanical Failing Load kN	Impact Failing Load N.cm	Lightning Impulse Withstand Voltage kV	Power Frequency withstand voltage kV		Approx.Net Weight Kg
									Wet	Dry	
LXHY4-70	U70BP	255	146	400	16	70	565	110	45	80	5.2
LXHY5-70	U70BLP	280	146	450	16	70	565	125	50	85	5.8
LXHY4-100	U100BP	280	146	450	16	100	678	125	50	85	5.9
LXHY4-120	U120BLP	280	146	450	16	120	678	120	50	85	6
LXHY4-160	U160BLP	280	170	450	20	160	1017	125	50	85	7.1
LXHY3-160	U160BP	280	155	450	20	160	1017	125	50	85	7
LXHY3-210	U210BLP	320	170	550	20	210	1017	140	55	90	9.6
LXHY3-240	U240BLP	320	170	550	20	240	1017	140	55	90	9.9

Address: No.16-1 Jinshui Avenue, Zhengzhou, 450003 China
 Tel:+86 371 65866081 65866099
 Fax: +86 371 65866088
 Email: libuguang@cmech-henan.com